


#1986 Bale Sensor — for continuous monitoring during baling. Comes with 30' cable to run from the sensor mounted in the bale chamber to the meter in the cab. May be used with any model, but is recommended to use with Model FX-2000. Also available as 1986/40 with 40' cable for larger balers.



#831 Short pin prod — for testing hay in the windrow (requires H-3 Handle).



#830-3 18" Prod — for testing hay in large square bales or round bales (requires H-3 Handle).

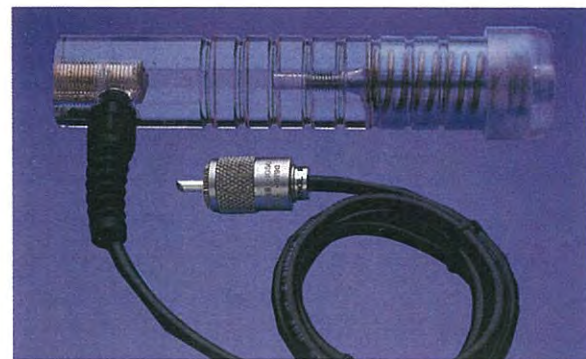


#H-3 Handle — mounts to the connector on the top of any meter to use the #830 series and #831 prods. This arrangement is recommended over the #1235 when testing any high density or larger bales to minimize stress placed on the meter case.

DELMHORST
INSTRUMENT CO.
WHEN ACCURACY IS THE POINT.™

For over 50 years, Delmhorst has been the leading manufacturer of high-quality resistance moisture meters. Today we offer a complete line of portable moisture meters for a variety of applications including woodworking/lumber, agriculture, construction and paper.

Hay Moisture Testers

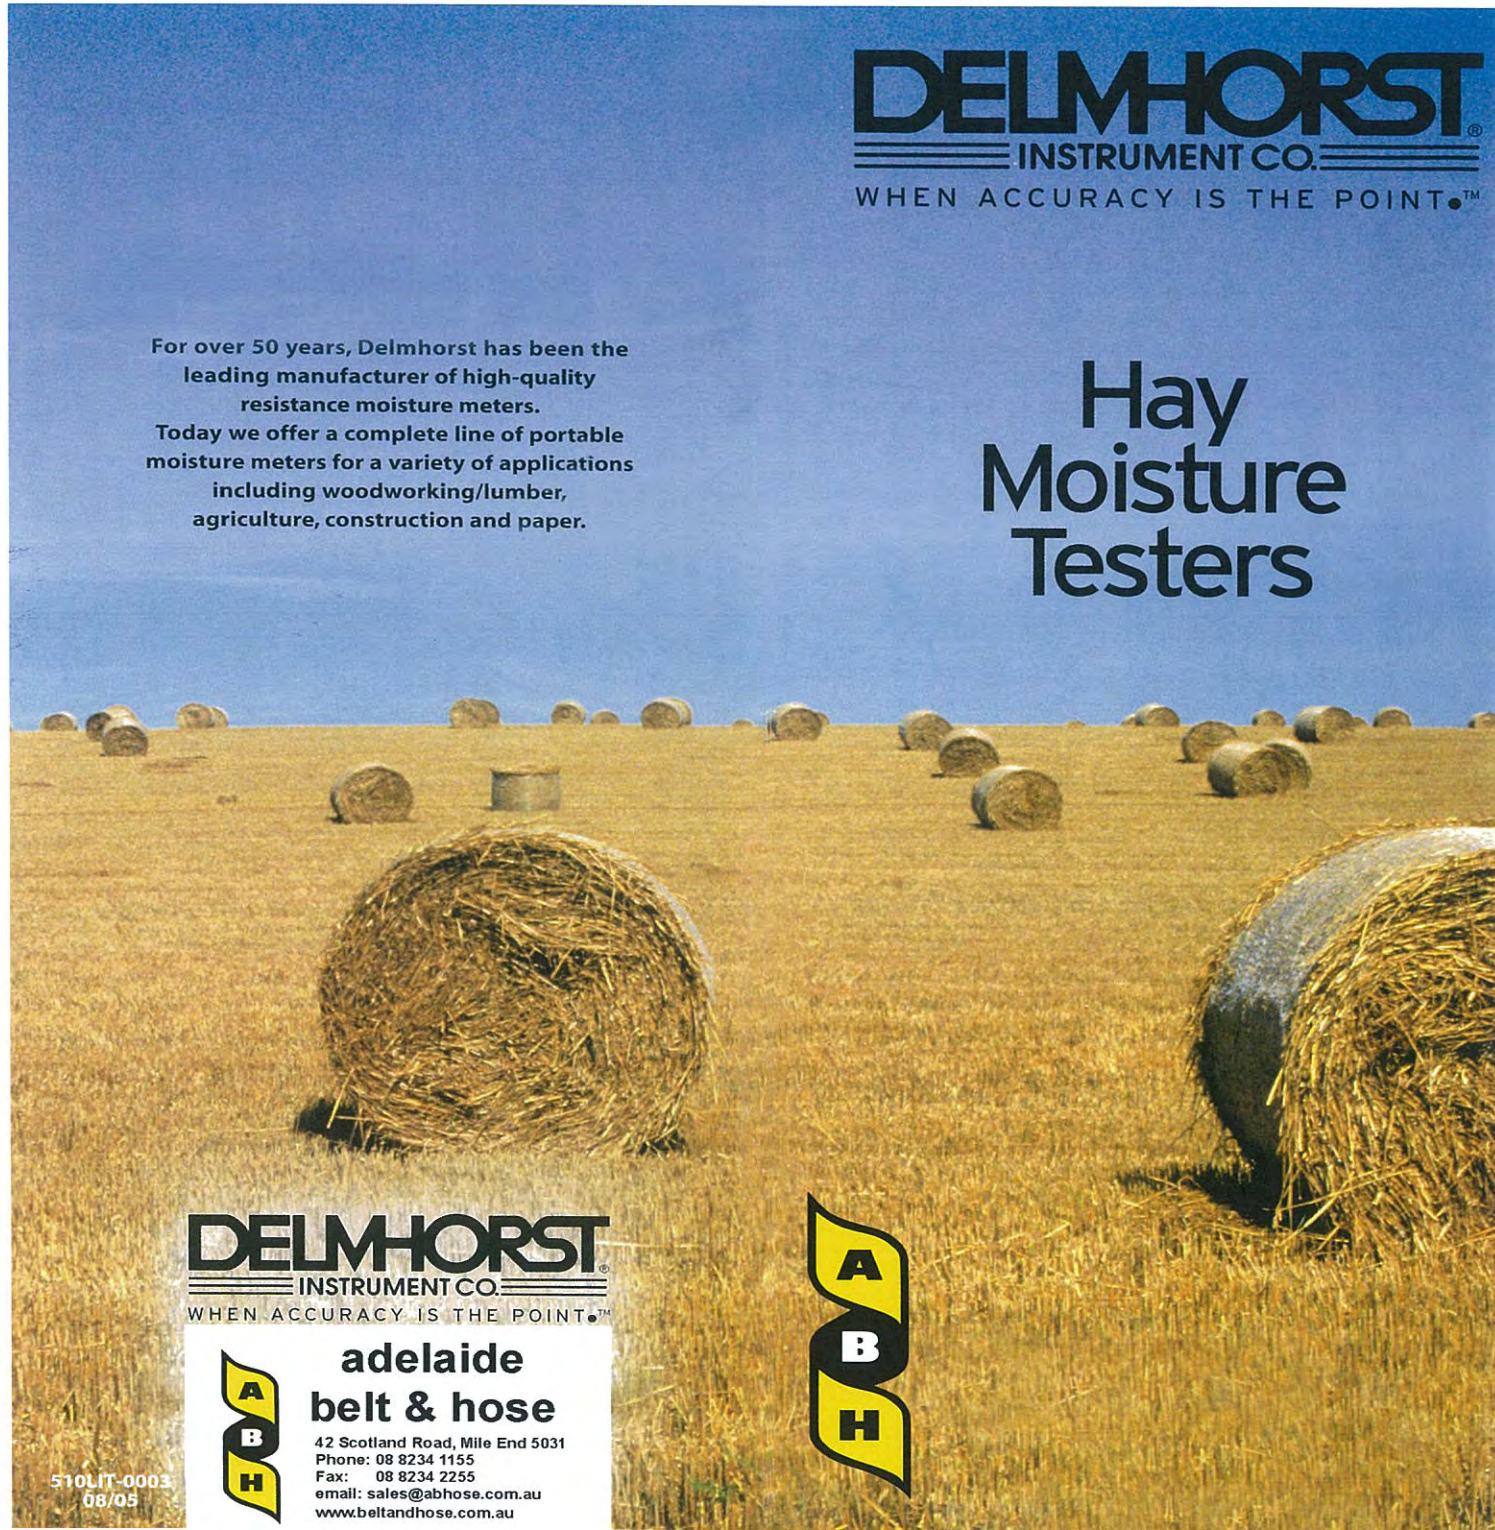

DELMHORST
INSTRUMENT CO.
WHEN ACCURACY IS THE POINT.™



**adelaide
belt & hose**

42 Scotland Road, Mile End 5031
Phone: 08 8234 1155
Fax: 08 8234 2255
email: sales@abhose.com.au
www.beltandhose.com.au



510LIT-0003
08/05



OVER 50 YEARS OF QUALITY, ACCURACY AND SERVICE

That's why so many hay producers rely on Delmhorst hay moisture testers to monitor and control moisture content. Proper moisture control at baling is key to reducing mold development, preserving leaves, color and feed value. These factors are critical to the hay producer's main goal – **to produce better quality hay and minimize economic losses.**


Delmhorst offers models ranging from the popular F-6/6-30 to the advanced FX-2000 which allows you to monitor moisture content while baling. Our assortment of models gives you the opportunity to select the right meter for your application.

DELMHORST - The Market Leader

Delmhorst has been producing moisture meters for over 50 years. Our products have been recognized the world over as the most rugged, most accurate moisture meters available today.

All Delmhorst meters include these outstanding features:

- ▶ Temperature stable circuit – calibration not affected by ambient temperature
- ▶ Built-in battery and calibration check – gives you confidence in performance and primary calibration
- ▶ Prompt delivery
- ▶ 1 or 3 year warranty – depending on model

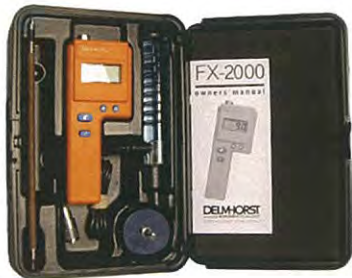

FX-2000 Deluxe



- ▶ Microcontroller circuit
- ▶ Can be used for on-the-go moisture monitoring or as a portable meter
- ▶ **In continuous mode:**
 - ▶ Takes two readings every second
 - ▶ Displays the **average and highest** of eight accumulated readings
 - ▶ Readings updated every 4 seconds
 - ▶ Back lighted display
- ▶ **In portable mode:**
 - ▶ Averages up to 100 accumulated readings
 - ▶ Displays **average and highest** of accumulated readings
- ▶ Measures moisture content over the range of 8%-40%
- ▶ **Three-year warranty**
- ▶ Ideal for high volume producers who need the time-saving convenience of on-the-go monitoring

Bale Sensor



For continuous monitoring during baling.

12 Volt DC Input Adaptor



F-2000 Basic



- ▶ Microcontroller circuit
- ▶ Averages up to 100 accumulated readings
- ▶ Displays average and highest of accumulated readings
- ▶ Measures moisture content over the range of 8%-40%
- ▶ **Three-year warranty**
- ▶ Great for the hay producer who utilizes the memory features for enhanced quality control

